



LED LAMPS



LED T8 Type B

96in (2x48") 42W Color Selectable



Halco's VersaConnect series offers 30 different lamps in 1 SKU. This 5000 lumen 8' T8 replacement ships in (2) 4' lengths to minimize shipping damage and storage costs. Halco's VersaConnect series comes in 5 different color temperatures, 3 different base types and is designed to replace glass or PET coated T8 8' Type B lamps for use industrial, commercial or food processing applications.



Versatile, 30 in 1 product

8' (2x4') LED T8 Type B Lamp

Five CCT Selectable (3000K, 3500K, 4000K, 5000K, or 6500K)


Three Base Types (Med Bi-Pin, Single Pin, Recessed Dbl Contact)

Replaces glass coated 8' T8 lamp or PET coated 8' T8 lamp

High Lumen Output (5000 LM)

5 Year Warranty

Illumination all the way to ends including connection points

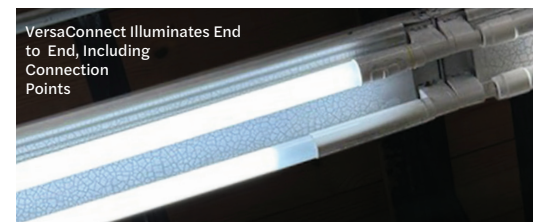

Applications:

- Industrial
- Commercial
- Warehouse
- Signage
- Manufacturing

Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com

LED T8 Type B

96in (2x48") 42W Color Selectable

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____

Performance

- 42W, 4620-5000 lumens
- Selectable 3000K, 3500K, 4000K, 5000K or 6500K
- 120-277 VAC
- L70 > 50,000 hours
- 80+ CRI
- DLC 5.1 standard
- UL Damp Location Listed
- RoHS
- NSF-2 food equipment rated
- Includes FA8 and R17D endcaps

Ordering Information

Product Code	Product Number	Product Description
96T8VC-42-8CS-DE-BYP-LED-CG	87210	VersaConnect LED T8 96in (2 X 48in) 42 Watt Color Selectable 3000K-3500K-4000K-5000K-6500K. Type B (Ballast Bypass) with FA8 and R17D End Caps Coated Glass

Accessories

FA8 and R17D End Caps Included

Ordering Logic: Ex: 96"-42W-8-CS-DE-BYP-LED-CG

Length / Shape	Wattage	CRI/CCT	Wiring	Compatibility	Technology	Construction
96 = 96 inches T8 = T8 Shape (1" Diameter) VC = VersaConnect	42W = 42 Watts	8 = 83 CR CS = Color Selectable 3000K/3500K/ 4000K/5000K/ 6500K	DE = Double Ended	BYP = Type B (Ballast Bypass)	LED	CG = Coated Glass

Specifications Table

	87210
Wattage	42W
CCT	Selectable 3000K / 3500K / 4000K / 5000K / 6500K
Lumens	4620-5000
Equivalent Wattage	60W
Efficacy	115 LPW
Amperage	0.388
Beam Angle	160°
Base Type	FA8 AND R17D
CRI	80
L70 Lifetime (Hrs)	50,000
Voltage	120 - 277 VAC
Power Factor	0.96
Environment	UL Damp Location Listed
Warranty	5 Years

